

Safe, One touch, Easy Color Changing, Speedy

Preeminent for sharpness!!

Water-Cooled Pelletizer

- KM200/KNW200 Series

U.S.A. Patent No.5186950
 U.K. Patent No.9206922.8
 R.O.C.Patent No.058973
 Germany Patent No.P 42 17 237

Super-flexible materials: rubber, urethane, elastomer, EVA
 Waterproof: Pours water, and cuts. Water circulation.
 Stable cut, high-speed, improved processing capacity
 Sharp cutter!

Strand with minor diameter from 0.3mm.
 Represses long-size or scrapes
 Washable. Even if it washes in cold water, there is no rust.




Standard Equipment:

- 30mm feed roller (40mm also available)
- New model entrance guide
- Rotating blades + fixed blades platform, water cooled

Options:

- Light alloy coating feed roller
- Light alloy coating tension roller (floating method)
- Air-nozzle for cutting unit, etc.

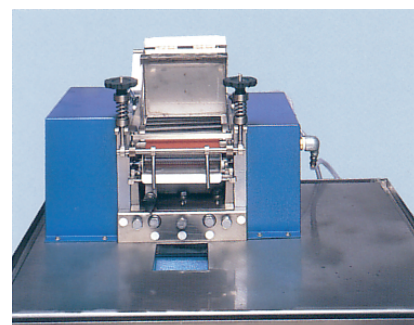

Model	KM200	KM200-300	KNW200-400	KNW200-500
Specification				
Cutting Ability	200 ~ 450kg/hr	450 ~ 700kg/hr	700 ~ 1100kg/hr	1000 ~ 1400kg/hr
Rotary Blade (mm)	200 x L200	200 x L 300	200 x L400	200 x L500
Drive Motor	3.7kW 4P	5.5kW 4P	7.5kW 4P	11kW 4P
Drive Control	Inverter			
Pellet Size	Single speed control, standard 2 to 7mm (mini-pellet 0.3 to 1.5mm also available)			
Speed of Pulling Strand	max.=70m/min. (Specification setting for low speed or high speed also available)			

KM, rotating blades: 12 - 34 NT (36 - 120 NT for mini-pellet specification)

KATSUMIX CO., LTD.

5043-8 Kimagase, Noda-city,
 Chiba 270-0222, JAPAN

Phone: 04-7198-2171 Fax: 04-7198-0834

e-mail: e-mix@katsumix.com URL: <http://www.katsumix.com>